



slim

ficha técnica

datasheet



ref. 5550242

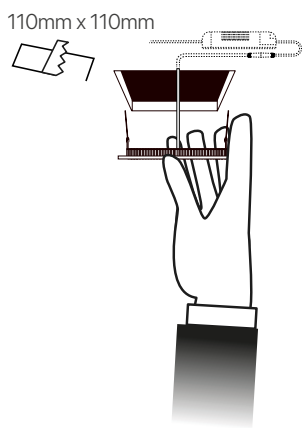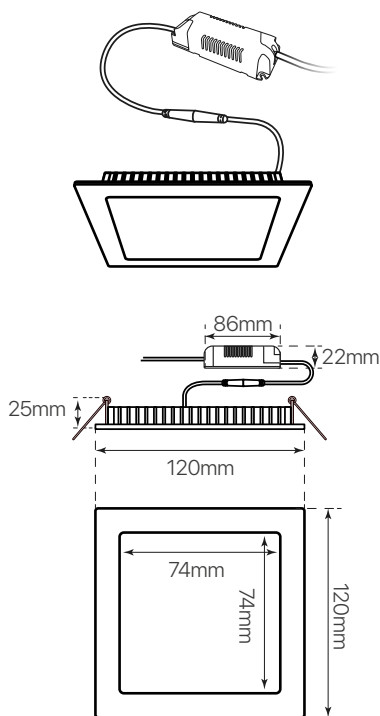

| | |
|---|--|
| Nombre / Name | Slim • downlight led empotrable cuadrado |
| Referencia / Reference | 5550242 |
| Materiales / Materials | Aluminio + PMMA / Aluminum + PMMA |
| Difusor / Diffuser | PMMA |
| Potencia / Power | 6W |
| Temperatura de color / Color temperature | 3200K |
| Flujo luminoso / Luminous flux | 600lm |
| Dimable / Dimmable | No |
| Ángulo de apertura / Beam angle | 110° |
| Ángulo de detección / Detection angle | - |
| IP | 44 |
| IK | 08 |
| F.P | >0.9 |
| UGR | 20 |
| IRC | >80 |
| Chip | EPISTAR 2835 |
| Driver | i-TEC series |
| Vida media (duración) / Average life | ± 50.000h |
| Clase energética / Energy class | A++ |
| Aislamiento eléctrico / Electrical isolation | Clase I / Clase I |
| Colores / Colors | Gris / Grey |
| Medida exterior / Product size | 120mm x 120mm x 25mm |
| Medidas de corte / Cutting measurements | 110mm x 110mm |
| Tª (ambiente/trabajo) / Tª (environment/work) | -20°C ~ 50°C |
| Input | AC85 ~ 265V |
| Output | DC12 ~ 28V |
| Frecuencia / Frequency | 50 / 60Hz |
| Peso / Weight | 206g |
| Certificados / Certificates | CE RoHS |
| Garantía / Warranty | 2 años / 2 years |