
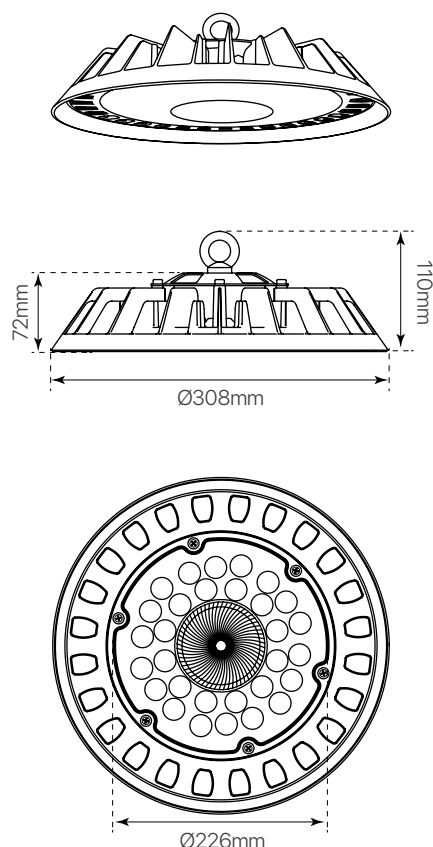


# balak

## ficha técnica

## datasheet

ref.5551392

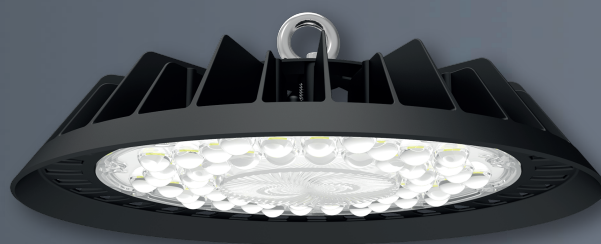

|                                                     |                         |
|-----------------------------------------------------|-------------------------|
| Nombre / Name                                       | Balak, campana led 150W |
| Referencia / Reference                              | 5551392                 |
| Materiales / Materials                              | Aluminio+PC             |
| Difusor / Diffuser                                  | PC                      |
| Potencia / Power                                    | 150W                    |
| Temperatura de color / color temperature            | 5700K                   |
| Flujo luminoso / Lumens                             | 15500lm                 |
| Dimable / Dimmable                                  | No                      |
| Ángulo de apertura / Beam angle                     | 120°                    |
| Ángulo de inclinación / Inclination angle           | -                       |
| IP                                                  | IP65                    |
| IK                                                  | 08                      |
| F.P. / P.F.                                         | >0,9                    |
| UGR                                                 | -                       |
| IRC / CRI                                           | >70                     |
| Chip                                                | PHILIPS Lumileds 2835   |
| Driver                                              | i-TEC series            |
| Vida media ( duración ) / Average life              | +30.000h                |
| Clase energética / Energy class                     | A+                      |
| Aislamiento eléctrico / Electrical isolation        | Clase I                 |
| Colores / Colors                                    | Negro / Black           |
| Medida exterior / Product size                      | Ø308mm x 72mm           |
| Protección contra Sobretensiones / Surge protection | 2kV                     |
| Tª (ambiente/trabajo) / Tª (enviroment/work)        | -40°C ~ +50°C           |
| Input                                               | AC220 ~ 240V            |
| Output                                              | DC220V                  |
| Frecuencia / Frequency                              | 50/60Hz                 |
| Peso / Weight                                       | 1,66kg                  |
| Certificados / Certificates                         | CE, RoHS                |
| Garantia / Warranty                                 | 2 años/ 2 years         |