



# tira led 2835

## ficha técnica

### datasheet

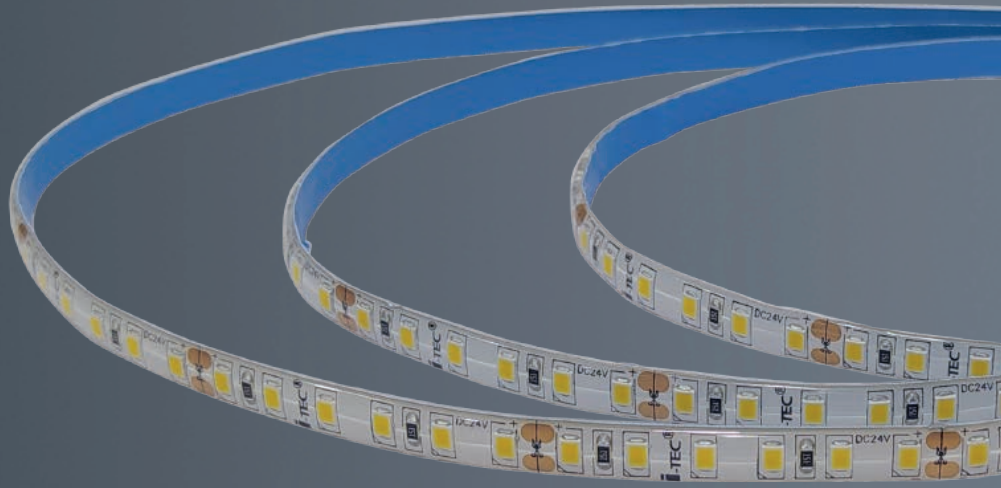

ref. 5550933

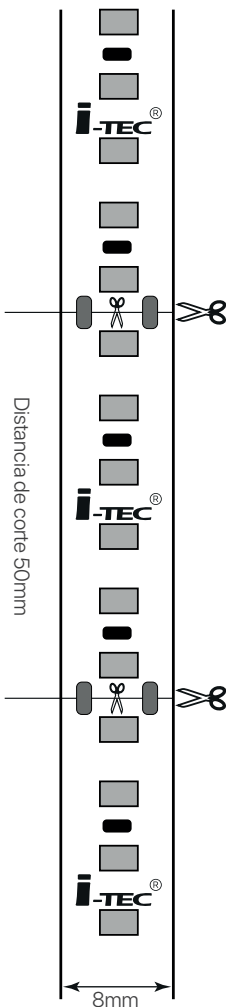

Nombre / Name	tira led 2835
Referencia / Reference	5550933
Materiales / Materials	Cobre + Plástico / Coper + Plastic
LED /mt	120 led/mt
Potencia / Power	72W (14,4W/mt)
Temperatura de color / Color temperature	4000K
Flujo luminoso / Luminoux flux	7800lm (1560lm/mt)
Dimable / Dimmable	Opcional / Optional
Ángulo de apertura / Beam angle	120°
Ángulo de inclinación / Inclination angle	-
IP	65
IK	-
F.P	-
UGR	-
IRC	>80
Chip	EPISTAR SMD 2835
Driver	-
Vida media ( duración ) / Average life	± 40,000h
Clase energética / Energy class	A+
Aislamiento eléctrico / Electrical isolation	-
Colores / Colors	Blanco / White
Medida exterior / Product size	5mts x 8mm
Medidas de corte / Cutting measurements	Cada 50mm / every 50mm
Tª (ambiente/trabajo) / Tª (enviroment/work)	-20°C ~ 45°C
Input	-
Output	DC24V
Frecuencia / Frequency	50/60Hz
Peso / Weight	260grs rollo / 260grs roll
Certificados / Certificates	CE RoHS
Garantia / Warranty	2 años / 2 years