
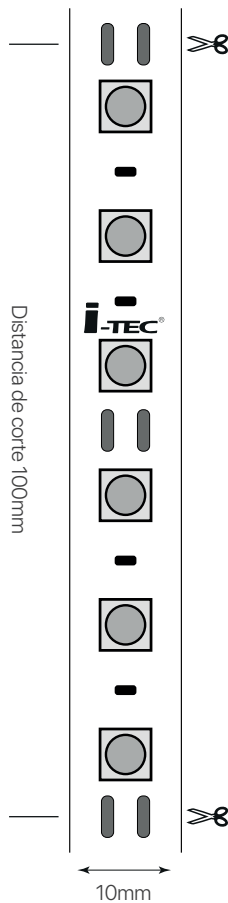


# tira led 5050

## ficha técnica

### datasheet

ref. 5551042

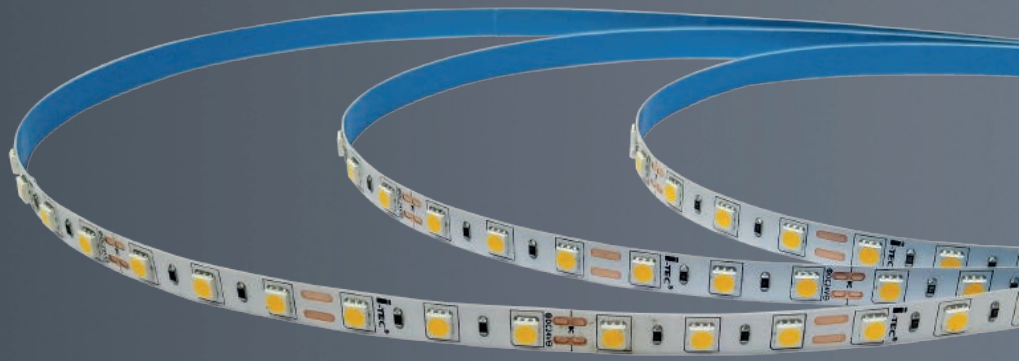

Nombre / Name	tira led 5050
Referencia / Reference	5551042
Materiales / Materials	Cobre + Plástico / Copper + Plastic
LED / mt	60 led/mt
Potencia / Power	56W (11,20W/mt)
Temperatura de color / Color temperature	6000K
Flujo luminoso / Luminous flux	6900lm (1380lm/mt)
Dimable / Dimmable	Opcional / Optional
Ángulo de apertura / Beam angle	120°
Ángulo de inclinación / Inclination angle	-
IP	20
IK	-
F.P	-
UGR	-
IRC	>80
Chip	EPISTAR SMD 5050
Driver	-
Vida media ( duración ) / Average life	± 40,000h
Clase energética / Energy class	-
Aislamiento eléctrico / Electrical isolation	-
Colores / Colors	Blanco / White
Medida exterior / Product size	5mts x 10mm
Medidas de corte / Cutting measurements	Cada 100mm / every 100mm
Tª (ambiente/trabajo) / Tª (environment/work)	-20°C ~ 45°C
Input	-
Output	DC24V
Frecuencia / Frequency	50/60Hz
Peso / Weight	100grs rollo / 100grs roll
Certificados / Certificates	CE RoHS
Garantía / Warranty	2 años / 2 years