
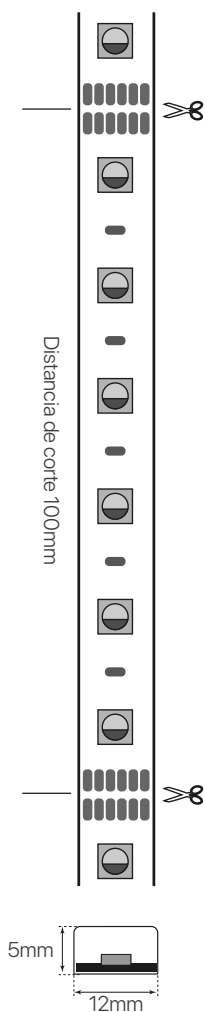


tira led 5050

ficha técnica

datasheet

ref. 5551357

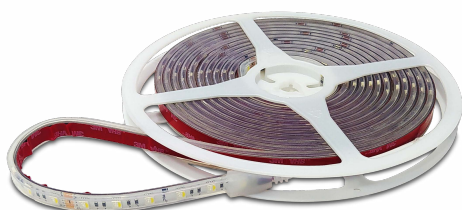

Nombre / Name	tira led 5050
Referencia / Reference	5551357
Materiales / Materials	Cobre + Plástico / Coper + plastic
LED / mt	60led/mt
Potencia / Power	4W/mt R • 4W/mt G • 4W/mt B 4,5W/mt White 12W/mt RGB 16,5W/mt RGB+W
Temperatura de color / Color temperature	RGB + W= 6000K
Dimable / Dimmable	Opcional / Optional
Ángulo de apertura / Beam angle	120°
Ángulo de inclinación / Inclination angle	-
IP	65
IK	-
UGR	-
IRC	>80
Chip	EPISTAR SMD 5050
Driver	-
Vida media (duración) / Average life	±40,000h
Clase energética / Energy class	A+
Colores / Colors	Transparente / Transparent
Medida exterior / Product size	5mts x 12mm x 5mm
Medidas de corte / Cutting measurements	Cada 100mm / every 100mm
Tª (ambiente/trabajo) / Tª (enviroment/work)	-20°C ~ 45°C
Input	-
Output	DC24V
Frecuencia / Frequency	50/60Hz
Peso / Weight	240grs Rollo / 240grs Roll
Certificados / Certificates	CE RoHS
Garantía / Warranty	2 años / 2 years