




# tira led 2835

## ficha técnica

### datasheet

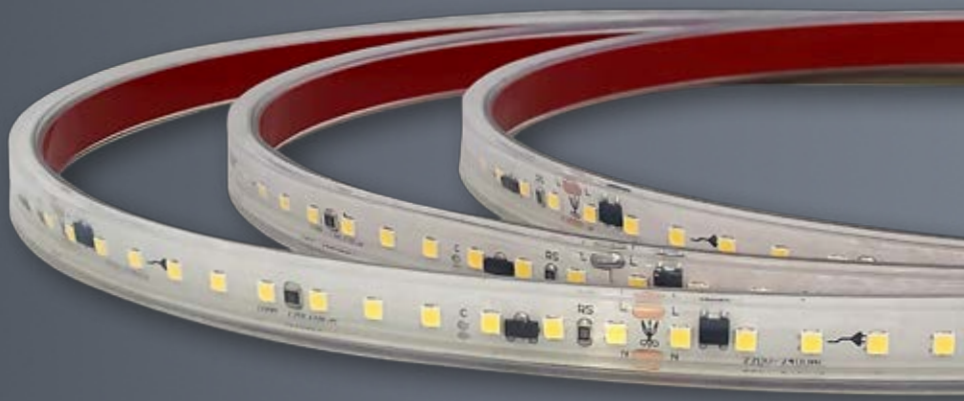

ref. 5551146

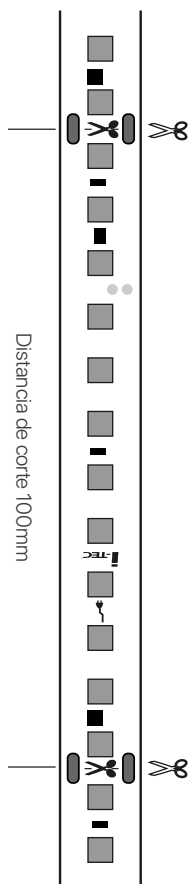

Nombre / Name	tira led 2835
Referencia / Reference	5551146
Materiales / Materials	Cobre + silicón / copper + silicone
LED / mt	120led/mt
Potencia / Power	16W/mt
Temperatura de color / Color temperature	2700K
Flujo luminoso / Luminous flux	1700lm
Dimable / Dimmable	Opcional / Optional
Ángulo de apertura / Beam angle	120°
Conexión / Connection	Máx. 20 mts. por tramo
IP	66
IK	-
F.P	>0,9
UGR	-
IRC	>80
Chip	EPISTAR SMD2835
Driver	-
Vida media (duración) / Average life	±40,000h
Clase energética / Energy class	A+
Aislamiento eléctrico / Electrical isolation	Clase II / Class II
Colores / Colors	Transparente / Transparent
Medida exterior / Product size	50mts x 12mm x 5mm
Medidas de corte / Cutting measurements	Cada 10cms / every 10 cms
Tª (ambiente/trabajo) / Tª (environment/work)	-20°C ~ 45°C
Input	AC230V
Output	AC230V
Frecuencia / Frequency	50/60Hz
Peso / Weight	4,2kg
Certificados / Certificates	CE RoHS
Garantía / Warranty	2 años / 2 years