


Lux, Curva de distancia

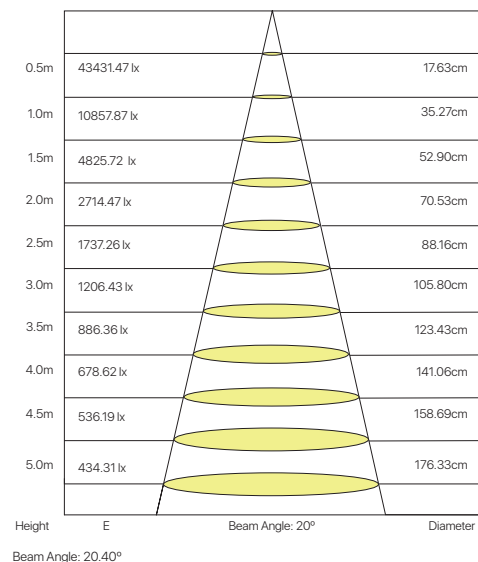

|   |                                      |
|---|--------------------------------------|
| Nombre / Name                                     | Store 30W • downlight led empotrable |
| Referencia / Reference                            | 5550824                              |
| Materiales / Materials                            | Aluminio / Aluminum                  |
| Difusor / Diffuser                                | -                                    |
| Potencia / Power                                  | 30W                                  |
| Temperatura de color / Color temperature          | 3000K                                |
| Flujo luminoso / Luminous flux                    | 2350 lm                              |
| Dimable / Dimmable                                | -                                    |
| Ángulo de apertura / Beam angle                   | 24°                                  |
| Ángulo de detección / Detection angle             | 20°                                  |
| IP  | IP20                                 |
| IK  | -                                    |
| F.P   | >0.5                                 |
| UGR   | -                                    |
| IRC   | >83                                  |
| Chip  | COB EPISTAR                          |
| Driver  | i-TEC SERIES                         |
| Vida media ( duración ) / Average life            | >30.000 h                            |
| Clase energética / Energy class                   | A+                                   |
| Aislamiento eléctrico / Electrical isolation      | Clase II / Class II                  |
| Colores / Colors                                  | Blanco / White                       |
| Medida exterior / Product size                    | 145mm x 145mm x 120mm                |
| Medidas de corte / Cutting measurements           | 125mm x 125mm                        |
| Tª ( ambiente/trabajo ) / Tª ( environment/work ) | -20°C ~ +50°C                        |
| Input   | AC 100 ~ 240V                        |
| Output  | DC 27~42V 720mA ±5%                  |
| Frecuencia / Frequency                            | 50 / 60Hz                            |
| Peso / Weight                                     | 650 grs.                             |
| Certificados / Certificates                       | CE                                   |
| Garantía / Warranty                               | 2 años / 2 years                     |