



tira led 5050

ficha técnica

datasheet

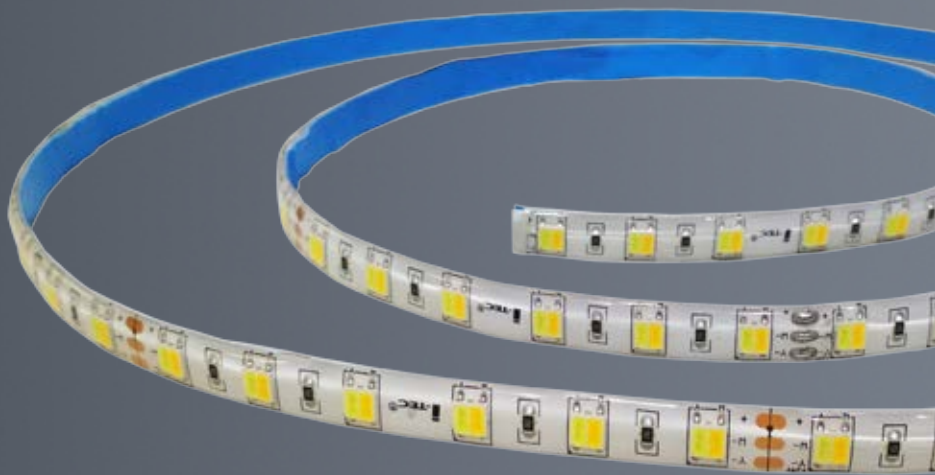

ref. 5551046

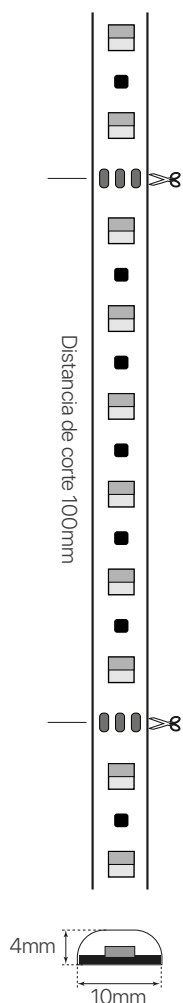

Nombre / Name	tira led 5050 • C+N+F
Referencia / Reference	5551046
Materiales / Materials	Cobre + Plástico / Coper + Plastic
LED / mt	60led/mt
Potencia / Power	6W/mt
Temperatura de color / Color temperature	Dualcolor
Flujo luminoso / Luminoux flux	575lm/mt
Dimable / Dimmable	Opcional / Optional
Ángulo de apertura / Beam angle	120°
Ángulo de inclinación / Inclination angle	-
IP	65
IK	-
F.P	-
UGR	-
IRC	>80
Chip	EPISTAR SMD 5050
Driver	-
Vida media (duración) / Average life	± 40,000h
Clase energética / Energy class	A+
Aislamiento eléctrico / Electrical isolation	-
Colores / Colors	Transparente / Transparent
Medida exterior / Product size	5mts x 16mm
Medidas de corte / Cutting measurements	Cada 100mm / every 100mm
Tª (ambiente/trabajo) / Tª (enviroment/work)	-20°C ~ 45°C
Input	-
Output	DC24V
Frecuencia / Frequency	50/60Hz
Peso / Weight	238grs rollo / 238grs roll
Certificados / Certificates	CE RoHS
Garantia / Warranty	2 años / 2 years