



# concord

## ficha técnica

### datasheet



ref. 5550307

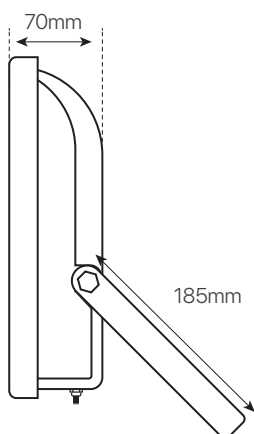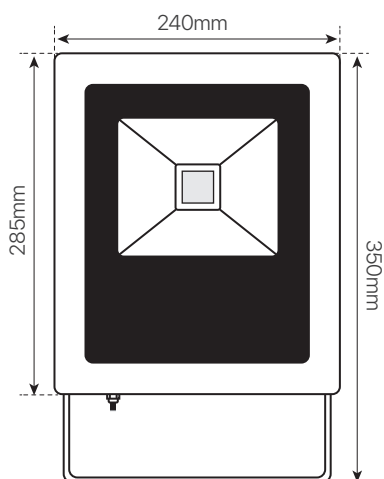

|   |                                       |
|---|---------------------------------------|
| Nombre / Name                                       | Concord proyector led                 |
| Referencia / Reference                              | 5550307                               |
| Materiales / Materials                              | Aluminio + Cristal / Aluminum + Glass |
| Difusor / Diffuser                                  | Aluminio / Aluminum                   |
| Potencia / Power                                    | 50W                                   |
| Temperatura de color / Color temperature            | 6500K                                 |
| Flujo luminoso / Luminous flux                      | 3750lm                                |
| Dimable / Dimmable                                  | No                                    |
| Ángulo de apertura / Beam angle                     | 110°                                  |
| Ángulo de inclinación / Inclination angle           | -                                     |
| IP  | 65                                    |
| IK  | -                                     |
| F.P   | 0.95                                  |
| UGR   | -                                     |
| IRC   | >70                                   |
| Chip  | EPISTAR COB                           |
| Driver  | i-TEC Series                          |
| Vida media ( duración ) / Average life              | >20.000 h                             |
| Clase energética / Energy class                     | A                                     |
| Aislamiento eléctrico / Electrical isolation        | Clase I / Class I                     |
| Colores / Colors                                    | Gris / Grey                           |
| Medida exterior / Product size                      | 240mm x 285mm x 70mm                  |
| Protección contra Sobretensiones / surge protection | 1.5kV                                 |
| Tª ( ambiente/trabajo ) / Tª ( enviroment/work )    | -25°C~ 60°C                           |
| Input   | -                                     |
| Output  | DC24V                                 |
| Frecuencia / Frequency                              | 50 / 60 Hz                            |
| Peso / Weight                                       | 2,38kg                                |
| Certificados / Certificates                         | CE                                    |
| Garantía / Warranty                                 | 2 años / 2 years                      |