
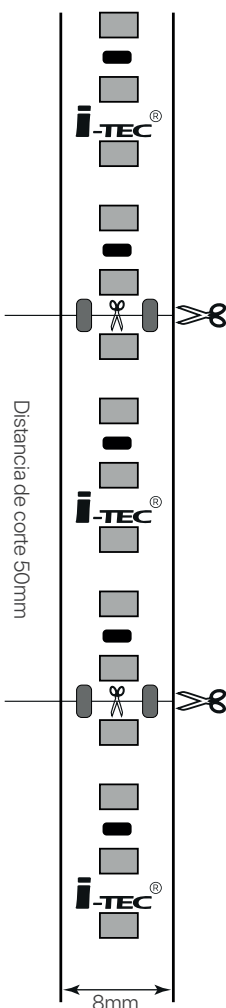


tira led 2835

ficha técnica

datasheet

ref. 5551350

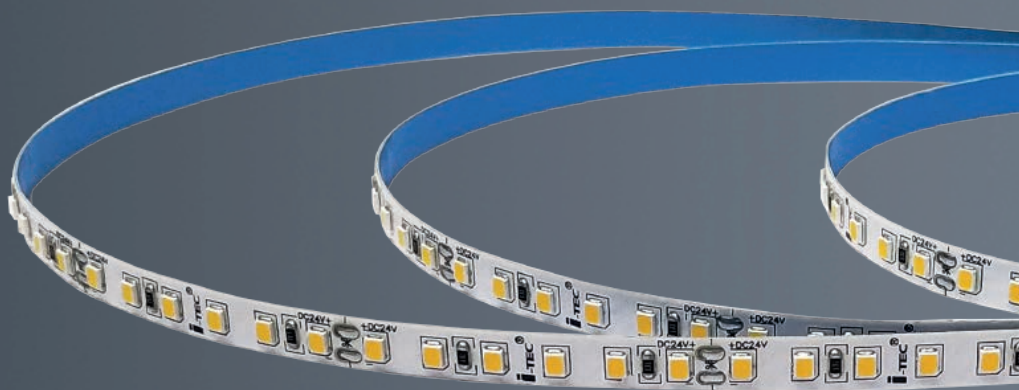

| | |
|---|-------------------------------------|
| Nombre / Name | tira led 2835 |
| Referencia / Reference | 5551350 |
| Materiales / Materials | Cobre + Plástico / Copper + Plastic |
| LED /mt | 120 led/mt |
| Potencia / Power | 72W (14,4W/mt) |
| Temperatura de color / Color temperature | 2100K |
| Flujo luminoso / Luminous flux | 7800lm (1560lm/mt) |
| Dimable / Dimmable | Opcional / Optional |
| Ángulo de apertura / Beam angle | 120° |
| Ángulo de inclinación / Inclination angle | - |
| IP | 20 |
| IK | - |
| F.P | - |
| UGR | - |
| IRC | >80 |
| Chip | EPISTAR SMD 2835 |
| Driver | - |
| Vida media (duración) / Average life | ± 40,000h |
| Clase energética / Energy class | A+ |
| Aislamiento eléctrico / Electrical isolation | - |
| Colores / Colors | Blanco / White |
| Medida exterior / Product size | 5mts x 8mm |
| Medidas de corte / Cutting measurements | Cada 50mm / every 50mm |
| Tª (ambiente/trabajo) / Tª (environment/work) | -20°C ~ 45°C |
| Input | - |
| Output | DC24V |
| Frecuencia / Frequency | 50/60Hz |
| Peso / Weight | 180grs rollo / 180grs roll |
| Certificados / Certificates | CE RoHS |
| Garantía / Warranty | 2 años / 2 years |