


vela led  
transparente  
ficha técnica  
datasheet

ref. 5550121

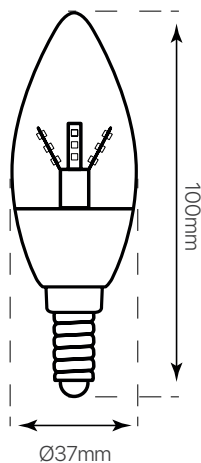

Nombre / Name	vela led transparente
Referencia / Reference	5550121
Materiales / Materials	Aluminio + Cristal
Difusor / Diffuser	Cristal
Potencia / Power	4W
Temperatura de color / Color temperature	3000K
Flujo luminoso / Luminous flux	400lm
Dimable / Dimmable	No
Ángulo de apertura / Beam angle	300°
Ángulo de inclinación / Inclination angle	-
IP	IP20
IK	-
F.P	>0.9
UGR	-
IRC	≥80
Chip	EPISTAR SMD 2835
Driver	i-TEC SERIES
Vida media ( duración ) / Average life	+20.000 h
Clase energética / Energy class	A+
Aislamiento eléctrico / Electrical isolation	-
Colores / Colors	Transparente
Medida exterior / Product size	Ø37 mm x 100 mm
Aislamiento eléctrico / Electrical isolation	-
Tª ( ambiente/trabajo ) / Tª ( enviroment/work )	-25°C ~ 40°C
Input	AC 180 ~ 240V
Output	-
Frecuencia / Frequency	50 / 60Hz
Peso / Weight	50g
Certificados / Certificates	CE RoHS
Garantía / Warranty	2 años