



# tira led 3528

## ficha técnica

### datasheet

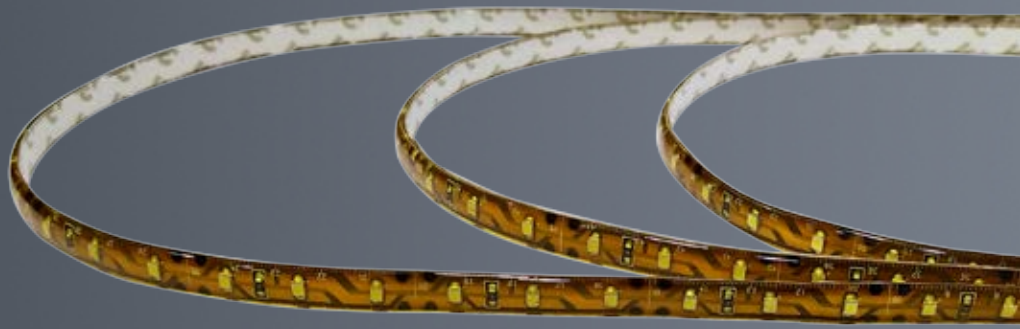

ref. 5550048

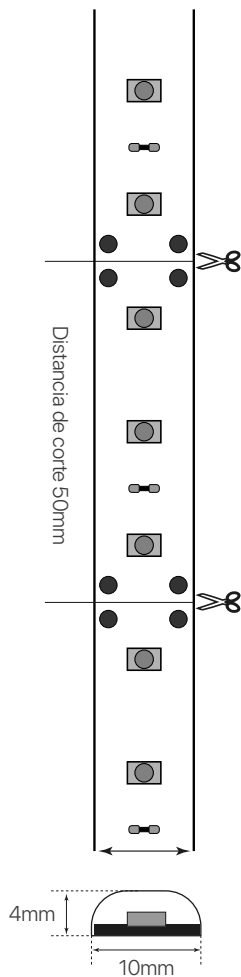

Nombre / Name	tira led 3528
Referencia / Reference	5550048
Materiales / Materials	Cobre + Plástico / Coper + Plastic
LED / mt	60 led/mt
Potencia / Power	20W (4W/mt)
Temperatura de color / Color temperature	6500K
Flujo luminoso / Luminoux flux	2100lm (420lm/mt)
Dimable / Dimmable	Opcional / Optional
Ángulo de apertura / Beam angle	120°
Ángulo de inclinación / Inclination angle	-
IP	65
IK	-
F.P	-
UGR	-
IRC	>75
Chip	EPISTAR SMD 3528
Driver	-
Vida media ( duración ) / Average life	± 40,000h
Clase energética / Energy class	-
Aislamiento eléctrico / Electrical isolation	-
Colores / Colors	Blanco / White
Medida exterior / Product size	5mts x 10mm
Medidas de corte / Cutting measurements	Cada 50mm / every 50mm
Tª (ambiente/trabajo) / Tª (enviroment/work)	-20°C ~ 45°C
Input	-
Output	DC12V
Frecuencia / Frequency	50/60Hz
Peso / Weight	240grs rollo / 240grs roll
Certificados / Certificates	CE RoHS
Garantía / Warranty	2 años / 2 years