


halide round

ficha técnica

datasheet

ref. 5550177

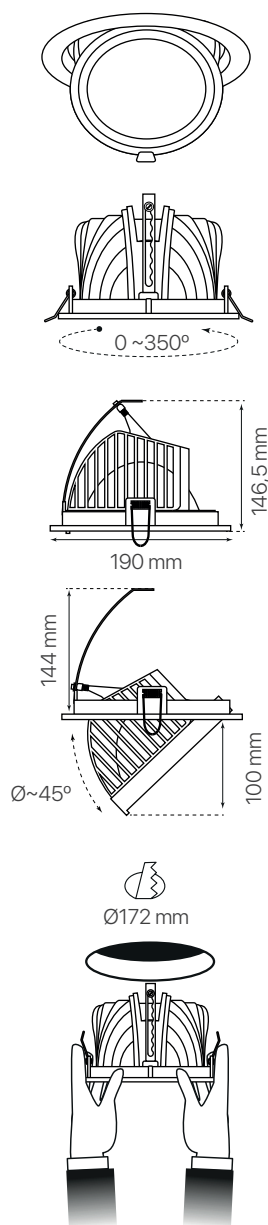

Nombre / Name	halide round, downlight empotrable
Referencia / Reference	5550177
Materiales / Materials	Aluminio / Aluminum
Difusor / Diffuser	Cristal / Glass
Potencia / Power	35W
Temperatura de color / Color temperature	4200K
Flujo luminoso / Luminous flux	3200lm
Dimable / Dimmable	No
Ángulo de apertura / Beam angle	40°
Ángulo de inclinación / Inclination angle	45°
IP	20
IK	-
F.P	-
UGR	-
IRC	-
Chip	EPISTAR COB
Driver	i-TEC series
Vida media (duración) / Average life	+30.000h
Clase energética / Energy class	A
Aislamiento eléctrico / Electrical isolation	-
Colores / Colors	Blanco / White
Medida exterior / Product size	Ø190mm x 146.5mm
Medidas de corte / Cutting measurements	-
Tª (ambiente/trabajo) / Tª (enviroment/work)	-20°C ~ 40°C
Input	AC100 ~ 240V
Output	DC24 ~ 43V 1.03A
Frecuencia / Frequency	50 / 60Hz
Peso / Weight	1.32kg
Certificados / Certificates	CE
Garantia / Warranty	2 años / 2 years